


Insert 63A, D III



See below:

[Approvals and Compliances](#)

**Description**

- Glass fiber Polyester
- Difficult to burn
- Impact resistant

**Characteristics**

- Protection 2-piece, transparent and sealable
- Partitioning between phase/phase and phase/N
- N-connector for TN-C to TN-S
- N-connector separating Piece self-opening when loosening the screw
- Neutral conductor screw: Tightening torque max. 2.5 Nm

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [Detailed request for product](#)

**Technical Data**

Rated Current Ie	63A @ 500VAC 63A@ 500VAC
Rated voltage Ue	500VAC
Rated isolation voltage Ui	1000VAC
Rated Power Operating Frequency fe	50Hz

Rated Impulse Withstand Voltage Uimp	6kV
Conditioned Rated Short Circuit Current	20kA @ 500VAC
Rated short-time withstand current with fuse links	20kA @ 500VAC
Allowed Ambient Temperature	-25°C to +40°C acc. to IEC 61439
Protection by closed housing	IP20

**Terminals**

Element with Double Straps	6 - 50mm <sup>2</sup>
----------------------------	-----------------------

Neutral Disconnecter with Straps	6 - 50mm <sup>2</sup>
Earth Connection Bride	6 - 50mm <sup>2</sup>

**Approvals and Compliances**


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

**Compliances**

The product complies with following Guide Lines

Identification	Details	Initiator	Description
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

## Dimensions [mm]

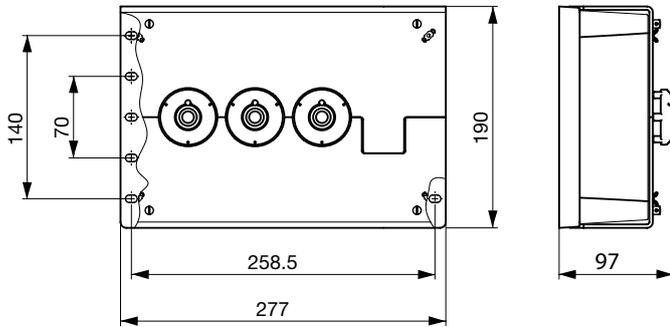

## All Variants

Designation	Terminal	Order Number	E-No.
63A DIII+0	Straps	0009.9103	-

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

## Packaging unit

1 Pcs